


VXO-3S-42p

Small SMD VCXO
HCMOS


QuartzCom
the communications company



Features

- Applications: telecommunications, instrumentation, microwave
- Small package size: 5.0 x 3.2 x 1.3 mm
- Output frequency up to 61.44 MHz
- Low jitter < 1.0 ps
- Highly shock and vibration resistant


Parameter	Specification	
Frequency range	2 ~ 61.44 MHz	
Standard frequencies	13.00, 19.20, 26.00, 27.00, 32.768, 38.40, 40.00 & 52.00 MHz	
Supply voltage	+3.3 V +5.0 V	±5 % on request
Supply current	10 ~ 25 mA	
Frequency stability (all inclusive) (*)	< ±25 ppm < ±50 ppm	over -20 ~ +70 °C over -40 ~ +85 °C
Output signal	HCMOS	
Output voltage	$V_{OH} \geq 0.9 V_{dc}$ $V_{OL} \leq 0.1 V_{dc}$	
Output load	15 pF	
Symmetry	45 ~ 55 %	@ ½ Vdc
Rise / Fall time	4 ~ 8 ns	
Frequency pulling range	±50 ~ ±100 ppm	
Voltage control	+1.65 V	±1.50 V
Enable / Disable function	Pin #6	high or open → pin #4 enable
Jitter (rms)	< 1 ps	@ 12 kHz ~ 20 MHz from carrier frequency
Operating temperature range	-20 ~ +70 °C -40 ~ +85 °C	commercial application industrial application
Packaging units	tape & reel	500 or 1.000 pieces
(*) All inclusive: frequency stability, tolerance, aging, supply & load variation		
Customer specifications on request		

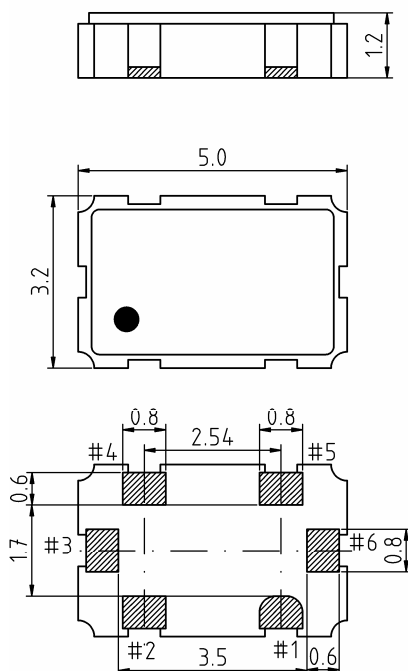

Pin function

- # 1 Vc Voltage control
- # 2 GND
- # 3 GND
- # 4 Output
- # 5 Vdc
- # 6 E/D

Example for solder pattern

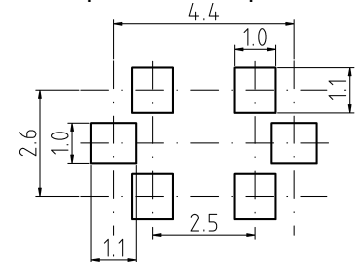

Do not design any conductive path between the pattern

Example for IR reflow soldering temperature

