
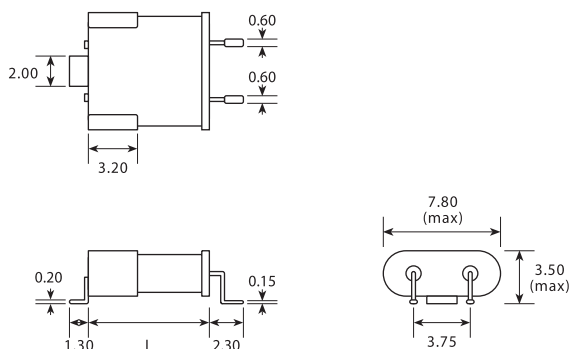


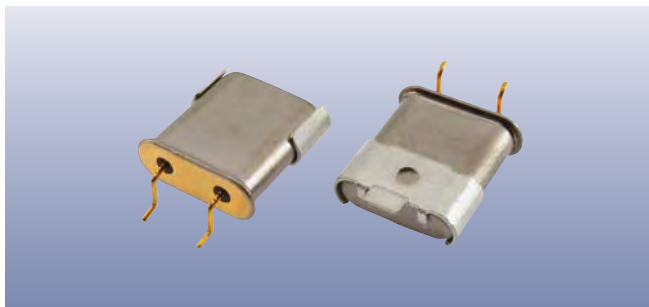

Package	Length L
UM-1J	8.00 max
UM-4J	4.80 max
UM-5J	6.00 max

90° cranked leads are available as an option to save approx 1mm in overall length. Contact our sales office for more details.

Features

- ➡ Ideal for custom frequencies & specifications
- ➡ Wide frequency range
- ➡ Tight specifications available
- ➡ Fundamental mode up to 55.0MHz

ESR Values

The table shows the maximum ESR values in ohms for each package across the available frequency range.

Frequency	Mode	UM-1J	UM-4J	UM-5J
3.5 ~ 4.99	Fundamental	200	-	-
5.0 ~ 5.99	Fundamental	150	-	-
6.0 ~ 6.99	Fundamental	120	-	-
7.0 ~ 7.99	Fundamental	100	-	-
8.0 ~ 9.99	Fundamental	90	-	-
10.0 ~ 15.9	Fundamental	40	60	60
16.0 ~ 55.0	Fundamental	30	40	40
30.0 ~ 49.9	3rd overtone	45	50	50
50.0 ~ 100	3rd overtone	60	60	60
60.0 ~ 150	5th overtone	90	120	120
130 ~ 300	7th overtone	150	150	150

Specifications

UM-1J: 8.0mm maximum body length

UM-4J: 4.8mm maximum body length

UM-5J: 6.0mm maximum body length

Parameters	Product			Option Code
	UM-1J	UM-4J	UM-5J	
Package:	UM-1J UM-4J UM-5J			
Frequency range:	3.579 ~ 300MHz 10.0 ~ 300MHz			
Calibration tolerance:	±5ppm ±7.5ppm ±10ppm ±20ppm ±30ppm Other values (±3ppm ~ ±100ppm)			L M 1 2 3 specify
Temperature stability:	±5ppm ±7.5ppm ±10ppm ±20ppm ±30ppm Other values (±3ppm ~ ±100ppm)			L M 1 2 3 specify
Operating temperature range:	0 to +50°C -10 to +60°C -20 to +70°C -30 to +80°C -40 to +85°C Other values			0 1 2 3 4 specify
Circuit condition:	12pF 16pF 20pF 30pF Series resonant Other values			B D F J S specify
Oscillation mode:	Fundamental 3rd overtone 5th overtone 7th overtone			F 3 5 7
Static capacitance (C₀):	7pF max			
Equivalent series resistance (max):	see table			
Ageing:	±3ppm max first year			
Test drive level:	100μW			
Soldering conditions:	260°C, 10sec max x 2			

■ Standard. □ Optional - Please specify required code(s) when ordering

Ordering Information

Product name + option codes + frequency

eg: **UM-1J/231JF 16.0MHz** 20/30/10/30-F

- ◆ Available on T&R - 1k pcs per reel.
- ◆ Refer to our website for T&R and soldering details.
- ◆ Some combinations of stability and temperature range may not be available. Please check with us before ordering.